

BMS



THE TECHNOLOGY LEADER IN TORQUE TOOLS

KEY FEATURES

- Easy to Use - Menu Driven
- Accuracy of better than 1%
- Viewing Angle of 170 degrees
- Battery Life of 180+ hours
- Option to customise

0000 Nm
TRACK
Menu
OLED Screen

Ez, Pro & Super Electronic Torque Wrenches



Ez, Pro & Super Electronic Torque Wrenches

Robust Bi-Directional Ratchet head



Ring and Open-end accessories available


Large Colour Organic LED Screen High Visibility Warning Signals

Membrane Tactile Switch with Green/Red LED warning Signals

Ergonomic Soft Grips for comfort



4xAA Batteries

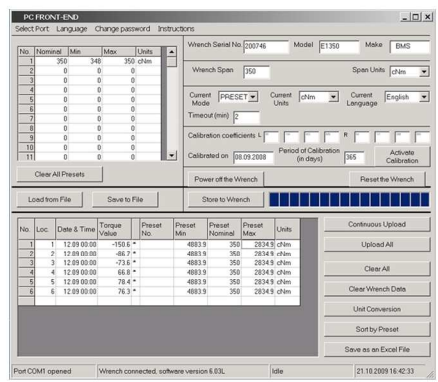

PCFE Software

Menu Options

Ez Pro Super

Language, Comms, Peak, Set, Recall, Upload, Clear		✓	✓
Date, Track, Preset, Units	✓	✓	✓
Display: Large Organic LED	✓	✓	✓
Units: cNm, Nm, kgfm, kgfcm, ozins, lbins, lbft	✓	✓	✓
Alarms: Audible & Visual Signals	✓	✓	✓
Automatic Zero Point Setting	✓	✓	✓
Automatic Power Down	✓	✓	✓
Over-torque: Warning system on display	✓	✓	✓
Interchangeable heads	✓	✓	✓
Batteries: Lifespan of 180+ hours	✓	✓	✓
Storage Capacity: 2000+		✓	✓
Languages: English	✓	✓	✓
Chinese, French, German, Italian, Japanese, Polish, Portuguese			✓
Russian, Spanish, others on request.			✓
Programmable presets: 99, via PC or directly on Wrench			✓
Electronic Calibration: by date or number of measurements			✓
Accuracy: better than 1% of actual reading LHS & RHS from 10% to 100% of specified range	✓	✓	✓
Display of measurement: Starts from 2% of maximum	✓	✓	✓
Window Excel & SPC compatible			✓
Comms: USB bi-directional communications		✓	✓
PLC Communications: Using ASCII or Binary transfer			✓

Note* Wrench can be configured to client specification

Track Mode	Preset Mode	Recall
<p>Displays Actual Torque as applied</p>	<p>Screen Changes Colour as Preset Torque reached</p>	<p>Store & View 2000+ results or Upload to PC or SPC</p>

	EZ	Pro	Super	Drive/Adaptor	Nm	lbins	lbft	Length	Weight
TW010E	TW010P	TW010S	1/4"/3/8":9x12	1-10	8.8-88	.73-7.3	410mm	.85Kg	
TW020E	TW020P	TW020S	1/4"/3/8":9x12	2-20	17-177	1.4-14	410mm	.85Kg	
TW050E	TW050P	TW050S	1/4"/3/8":9x12	5-50	44-442	3.6-36	410mm	.85Kg	
TW100E	TW100P	TW100S	1/4"/3/8":9x12	10-100	88-885	7.3-73	410mm	.85Kg	
TW135E	TW135P	TW135S	1/4"/3/8":9x12	13.5-135	-	9.9-99	410mm	.85Kg	
TW150E	TW150P	TW150S	1/2":14x18	15-150	-	11-110	625mm	1.3Kg	
TW200E	TW200P	TW200S	1/2":14x18	20-200	-	14-147	625mm	1.3Kg	
TW250E	TW250P	TW250S	1/2":14x18	25-250	-	18.4-184	625mm	1.3Kg	
TW300E	TW300P	TW300S	1/2":14x18	30-300	-	22-220	625mm	1.3Kg	
TW340E	TW340P	TW340S	1/2":14x18	34-340	-	25-250	625mm	1.3Kg	



Up to 1000Nm

Note* Wrench can be configured to have any range from 10-100% Up to 1000Nm wrenches are available for Super Range

