


## Expanding Fastening Horizons

Stanley's 4 and 8 position Socket Trays, available in 24 VDC or Fieldbus models, allow a single tool to reliably assemble joints at different target torque levels, batch counts or fastening strategies maximizing quality, productivity, efficiency and floor space.



For the QA, QC and PSI Series of Controllers

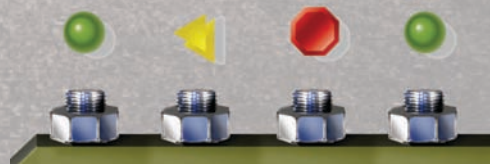


## Features

- Optical Sensors for Maximum Lifespan
- Poka-Yoke error proofing for same external socket sizes (Optional)
- I/O repeater provides access to controller 24V Interface (Optional)
- Compact design for maximum space saving
- Ready for Theta, Alpha, Kappa and PSI Controllers




New optional I/O repeater allows additional I/O devices to be used with the same controller expanding the reach and ability to interface with multiple devices.


LED Status Lights

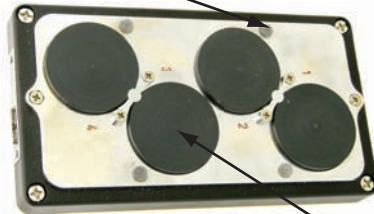

Large Socket Size Range

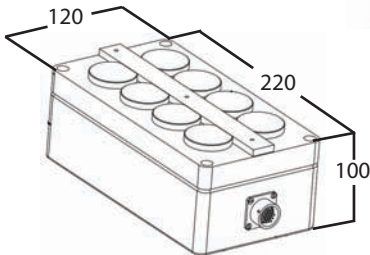

Tray Diminsions

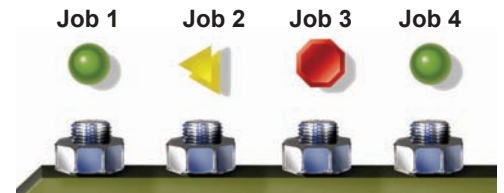

Multiple PSets = Lower Cost

## Ordering Data

Ordering Number	Description	Controller Series				Max Socket Size mm
		Alpha	Kappa	Theta	PSI	
20C109007	7M SOCKET TRAY CABLE FOR QA SERIES	x	x			-
20C109107	7M SOCKET TRAY CABLE FOR QC SERIES			x		-
20C109207	7M SOCKET TRAY CABLE FOR PSI SERIES				x	-
QA1S04-54	4 POSITION SOCKET TRAY, 24V I/O	x	x	x	x	54
QA1S08-33	8 POSITION SOCKET TRAY, 24V I/O	x	x	x	x	33
QA1SR04-54	4 POSITION SOCKET TRAY, REPEATER	x	x	x	x	54
QA1SR08-33	8 POSITION SOCKET TRAY, REPEATER	x	x	x	x	33
QA4S04-54	4 POSITION SOCKET TRAY, DEVICENET	x				54
QA4S08-33	8 POSITION SOCKET TRAY, DEVICENET	x				33
QA5S04-54	4 POSITION SOCKET TRAY, ENET MODBUS	x				54
QA5S08-33	8 POSITION SOCKET TRAY, ENET MODBUS	x				33

When using multiple sockets and programs please ensure that the torques programmed are within the working specifications of the tool and controller used.

